



# RACKING SYSTEMS

250 Maple Ave  
Bird-In-Hand, PA 17505  
717-397-4079 ext. 106

## STAND-ALONE INSTALLATION



1 Secure the upright to the base using 4 nuts and 4 bolts. Repeat for multiple uprights if applicable.



2 Install two crossbraces using 6 bolts and nuts (6 per cross brace) to connect uprights. Adjust to the preferred upright centers. Repeat for multiple uprights if applicable.



3 Attach arms by sliding the hook into the desired spaces on the upright to securely lock arms in place.

## WALL-MOUNT INSTALLATION


**! IMPORTANT:**  
Be sure to fasten to a solid wall structure. Weight limits vary depending on wall construction.



1 Determine first upright position. Then measure subsequent centers and mark.




2 Mark and screw in.



3 Attach arms by sliding the hook into the desired spaces on the upright to securely lock arms in place.

## BACK TO BACK SETUP

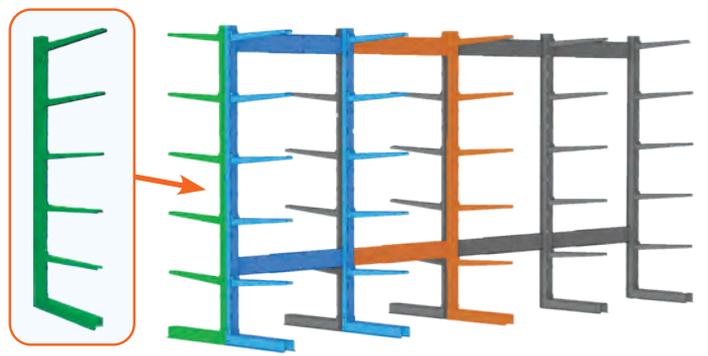

UPRIGHT ONLY KIT    STARTER KIT    ADD-ON KIT

## OPTIONAL SHELVING



Install shelving using pre-drilled holes for plywood or CMS aluminium shelves.


## OPTIONAL ARM STOPS



Insert arm stops to keep items from rolling off the shelf.

*Solutions to*  
**KEEP YOUR SPACE ORGANIZED. 😊**

**WALLMOUNT**  
**STANDALONE**

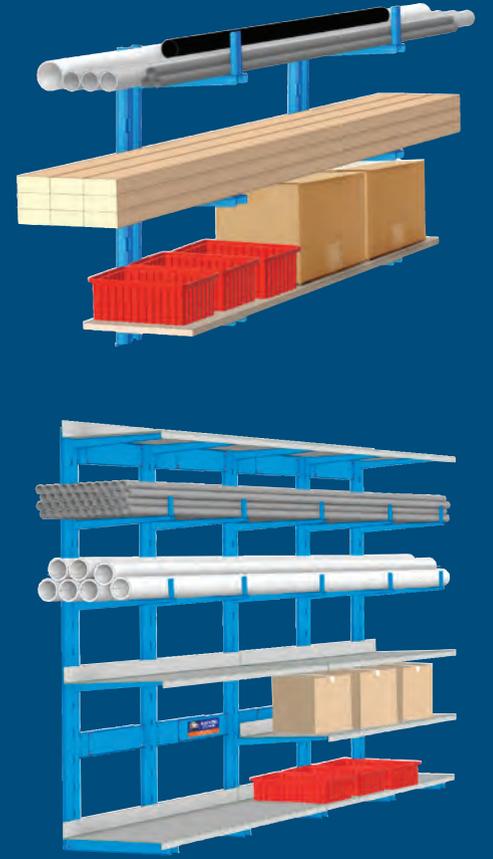

**RACKING SYSTEMS**



## VERSATILE STORAGE

Great for versatile garage storage! Use your own plywood for sturdy, economic shelving or CMS aluminum shelves.

Adjustable crossbraces allow for **32", 36", 40", 48", 52", 56", 60"** centers.



## CONFIGURATIONS

The customization of CMS Racking allows configurations including **back-to-back racking.**

Closer spacing between uprights accommodates more weight.





## MIXED-USE

Excellent for mixed use warehousing or retail displays for both cantilever storage and shelving!

**CMS aluminum shelves** are best for **32" or 48"** centers, available in **4' or 8'** length.

## STAND ALONE

Height	<b>6' or 8'</b>
Specs	<i>Upright Max 1000 lbs Arm max 200 lbs each 32" - 60" adjustment every 4" Powder coated steel</i>
<b>STARTER KIT</b>	<p>2 uprights 10 ct arms □12" □18" □24" 2 adjustable cross braces Fasteners</p> 
<b>ADD-ON KIT</b>	<p>1 upright + 1 base 5 ct arms □12" □18" □24" 2 adjustable cross braces Fasteners</p> 
<b>UPRIGHT ONLY KIT</b>	<p>1 upright + 1 base 5 ct arms □12" □18" □24" Fasteners</p> 

## WALL MOUNT

Height	<b>30"</b>
Specs	<i>Upright Max depends on wall construction and installation Arm max 200 lbs each Powder coated steel</i>
<b>STARTER KIT</b>	<p>2 uprights 6 ct arms □12" □18" □24" Fasteners</p> 
<b>ADD-ON KIT</b>	<p>1 upright 3 ct arms □12" □18" □24" Fasteners</p> 

**Extendable!** Add another upright to double your height!

**2801-94**  
8' Upright  
94" x 5 1/4" x 2 1/2"

**2801-70**  
6' Upright  
70" x 5 1/4" x 2 1/2"

**2801-30**  
30" Wall-Mount Upright  
30 3/8" x 3 1/4" x 1 3/8"

**2804-12**  
12" Arm  
13" x 2 1/2" x 2 1/2"

**2804-18**  
18" Arm  
19" x 2 1/2" x 2 3/4"

**2804-24**  
24" Arm  
25" x 2 1/2" x 3"

**2802-24**  
Base  
26" x 5 1/2" x 4 3/4"

**2803 - A**  
Cross Brace A  
30 3/8" x 5 3/4" x 7/8"

**2803 - B**  
Cross Brace B  
28 3/8" x 5 1/2" x 7/8"

4' Aluminum Shelves  
Starter Shelf

**2805-12x48**    **2805-18x48**    **2805-24x48**  
12" x 48" x 4"    18" x 48" x 4"    24" x 48" x 4"

8' Aluminum Shelves  
Recommended use on 32" or 48" centers

**2805-12x96**    **2805-18x96**    **2805-24x96**  
12" x 96" x 4"    18" x 96" x 4"    24" x 96" x 4"



Base fasteners included with stand alone kits